


## LCG50

---

### Applications

The LCG50 has a wide variety of applications:

- Vehicle Instrumentation
- Robotics
- Flight Testing
- Guidance and Control Systems
- Short Term Navigation
- Ride Control - Stabilization

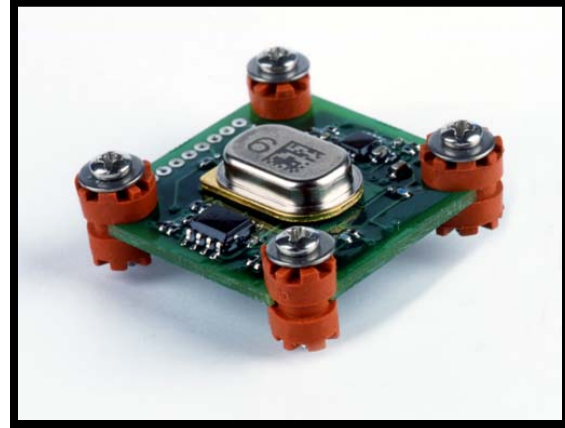


### Description

The LCG50 (Low Cost Gyro 50) offers a MEMS (Micro Electro Mechanical System) single axis angular rate sensor on a small PC board. The sensor is a complete unit and requires only a single DC voltage input to measure angular rate. The LCG50 is ideally suited for embedded applications, where mounting versatility is required, unit price is low, robustness is essential, and the performance characteristics must match that of much more expensive instrument grade rate sensors.

### Key Performance Features

- Proven MEMS Technology
- DC Voltage Input
- Wide Bandwidth
- Analog Voltage Output
- Low Power Consumption
- High Reliability
- Wide Operating Temperature Range
- Small Size
- Fast Start-Up
- DC In DC Out
- Temperature Sensor Output



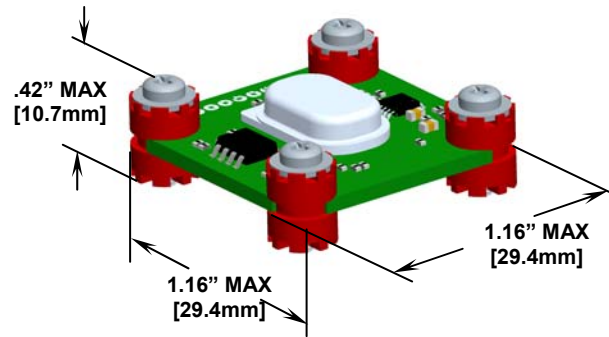

DIMENSIONS IN INCHES &amp; MILLIMETERS

PARAMETER	SUMMARY SPECIFICATIONS			
PART NUMBER	LCG50-00020-100	LCG50-00100-100	LCG50-00250-100	LCG50-00500-100
<b>Power Requirements</b>				
Input Voltage	+5.0 Vdc			
Input Current	< 8 mA @ +5.0 Vdc			
<b>Performance</b>				
Standard Ranges	±20s	±100°/s	±250°/s	±500°/s
Scale Factor Calibration at 22°C	50 mV/°/sec ± 15%	16 mV/°/sec ± 15%	6.4 mV/°/sec ± 15%	3.2 mV/°/sec ± 15%
Scale Factor over Temperature	<0.1%/°C			
Bias Calibration at 22°C	+2.5 Vdc ± 0.6 Vdc	+2.5 Vdc ± 0.2 Vdc	+2.5 Vdc ± 0.2 Vdc	+2.5 Vdc ± 0.2 Vdc
Bias Variation over Temperature	10°/sec	8°/sec	10°/sec	20°/sec
G Sensitivity	<0.05°/sec/g			
Start-Up Time	< 2 sec			
Bandwidth (-3dB)	>50 Hz			
Non-Linearity - % Full Range	< 0.05%			
Output Noise (DC to 100 Hz)	< 0.005°/s/√Hz	< 0.005°/s/√Hz	< 0.006°/s/√Hz	< 0.01°/s/√Hz
<b>Temp Sensor</b>				
Scale Factor	6.25 mV/°C Typical			
Output Voltage at 0°C	+ 424 mV Typical			
<b>Environments</b>				
Operating Temperature	-40°C to +85°C			
Storage Temperature	-55°C to +100°C			
Vibration Operating	5 g <sub>rms</sub>			
Vibration Survival	10 g <sub>rms</sub>			
Shock	500g PK ½ sine 2 msec			
Weight	<0.4 oz. [12 grams]			

**For more information contact:**

Systron Donner Inertial  
 2700 Systron Drive  
 Concord, California 94518 USA  
 +1-925-979-4500 or +1-866-234-4976



Email: [Sales@systron.com](mailto:Sales@systron.com)